

STEALTH

Manual-Tie Horizontal Baler



The Stealth Baler can also be fitted with a hydraulic bale door release.

NEXGEN's **STEALTH Baler** is specially designed for baling OCC and similar material and is the **most affordable horizontal baler on the market!**


- ▼ With its large 46" x 60" feed opening, the **STEALTH** can produce bales of cardboard that weigh up to 1400 pounds!
- ▼ Bale wires can be inserted through the door or sides
- ▼ Patents Pending

NEXGEN®
BALING SYSTEMS



STEALTH[®]

Manual-Tie Horizontal, Closed-End Baler

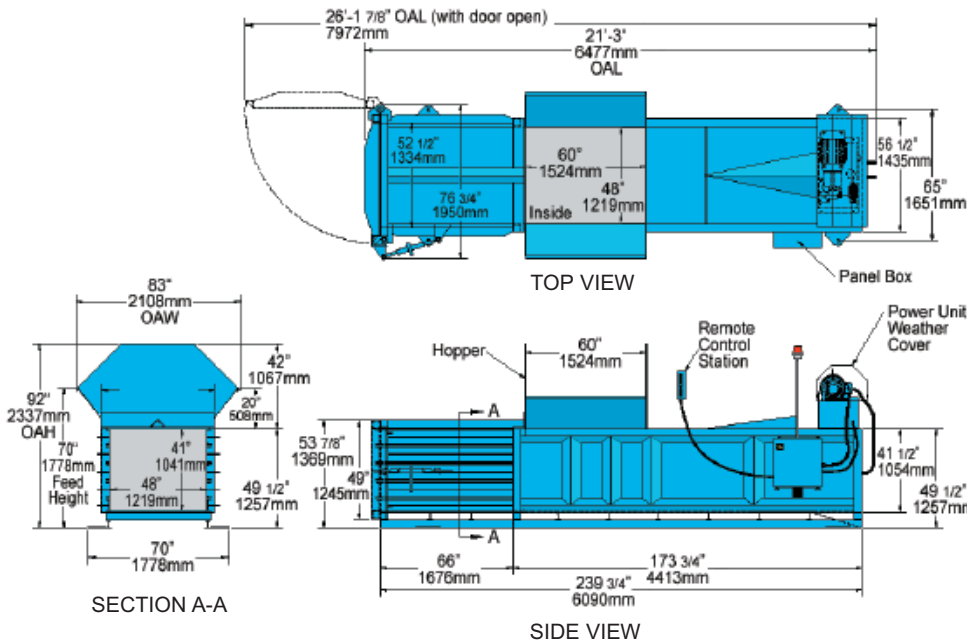

Standard Features

- ▼ 46" w x 60" L Feed Opening
- ▼ Hand Feed Type Hopper
- ▼ 1-2 Tons/Hour Throughput
- ▼ Through Door & Side Tie-Off
- ▼ Start Up Alarm
- ▼ Manual Controls
- ▼ Electrical Disconnect

Optional Features

- ▼ Photocell Control
- ▼ Hydraulic Bale Door Release
- ▼ Bale Made Alarm
- ▼ Chute Feed Hopper
- ▼ Conveyor Controls
- ▼ Oil Heater

Specifications

Dimensional

Length	255" (6477mm)
Width	83" (2108mm)
Height	92" (2337mm)
Hopper Type	Hand Feed
Feed Opening	46"W x 60"L (1168mm x 1524mm)
Feed Height	70" (1778mm)
Baler Weight (approx.)	11,300 lbs. (5126 kg)

Performance

Cycle Time	50 sec.
Maximum Force	67,900 lbf. (302 kN)
Ram Face Pressure	43 psi (296.5 kPa)

Output

Bale Size	42" x 48" x 60" (1067mm x 1219mm x 1524mm)
Bale Weight (OCC)	up to 1400 lbs. (635 kg)
Throughput	1 - 2 tons/hr (900 - 1800 kg/hr)

Hydraulics

Cylinder Size	6" bore x 4" rod 152mm x 102mm)
Cylinder Stroke	82" (2083mm)
Pump Flow	18.5 gpm (70 L/min)
Reservoir Size	30 gal. (113.6 lit.)
Maximum Pressure	2400 psi (165 bar)

Electrical

Motor Size	20 hp (14.9 kW)
Main Voltage	460 VAC, 3 phase
Control Voltage	120 VAC
Control Panel	UL Listed

Authorized NEXGEN Dealer:

Visit our website: www.NEXGENbalers.com



MARATHON EQUIPMENT COMPANY

P.O. Box 1798 • Vernon, AL 35592-1798 USA • (205) 695-9105 fax (205) 695-7250 1-800-633-8974

130 Hwy. 339 • Yerington, NV 89447 USA • (775) 463-4030 fax (775) 463-4531 1-800-624-5724

1102 Industrial Park Rd. • Clearfield, PA 16830 USA • (814) 765-0200 fax (814) 765-2072 1-800-922-7062

Pictures in this literature are illustrative only. Specifications are subject to change without notice in order to accommodate improvements to the equipment. Certified in compliance with ANSI Regulation Z245.5 and all OSHA standards. Products must be used with safe practice and in accordance with said regulations and standards.

