



# RJ-225 On-Site Compactor




## *Marathon's Most Popular Compactor, for Many Great Reasons!*

**T**he RamJet 225 is your best compactor value. Built for reliable performance in commercial and medium industrial situations, it effectively reduces solid waste material to a fraction of its original size. It is attractively priced and features 56 second cycle time and powerful 55,100 lbs. maximum compaction force!

### *Added Value Features*

- ✓ **Allen-Bradley** motor starter
- ✓ **Heavier steel** in key structural areas for heavy duty construction: charge box floor and ram face 1/2" steel; ram top, 3/8" steel; sides 1/4" steel plate.
- ✓ **TEFC** (Totally Enclosed Fan Cooled) motor
- ✓ **Quick release motor mount** on the side mounted power unit for easy servicing and maintenance.
- ✓ **TRICON Fullness Assurance System.** This time shifting device eliminates all but one limit switch. It also produces better compaction ratios by making the ram dwell against the trash reducing the "memory" and springback. TRICON offers better cold weather performance and extends the life of the machine.

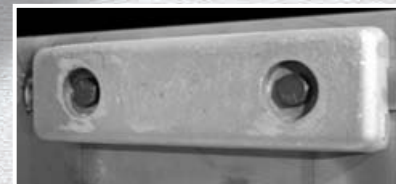

### *Ram Guide System*

The packing ram is supported and guided by specially formulated cast iron shoes which ride on replaceable wear strips. This exclusive design protects the charge box floor from the full force of the packing ram, extending its life and dramatically reducing compaction-robbing friction.



*Marathon's  
Side-Mounted  
Power Unit offers the convenience and ease-of-maintenance of a remote power pack with the space savings of an integrated power pack.*

**Specifications:**

Charge Box Capacity  
 [Mfrs. Rating].....2.0 cy.....1.5 m<sup>3</sup>  
 [WASTEC Rating].....1.55 cy.....1.18 m<sup>3</sup>  
 Clear Top Opening .....40.5" X 60" ....1029mm x 1524mm  
 Capacity Per Hour .....100 cy.....76 m<sup>3</sup>

**Performance Characteristics:**

Cycle Time .....56 s .....56 s  
 Total Normal Force.....46,700 lb .....208 kN  
 Total Maximum Force.....55,100 lb .....245 kN  
 Normal Ram Face Pressure.....26.8 psi.....185 kPa  
 Maximum Ram Face Pressure.....31.7 psi.....219 kPa  
 Ram Penetration.....14" .....356 mm

**Electrical Equipment:**

Electrical Motor 3/60-208/230/460 ... 10 hp.....7.5 kW  
 Electrical Control Voltage.....120 VAC.....120 VAC  
 UL Labeled Panel Box: Type NEMA 3R, All Circuits Fused  
 Standard 2 Button Controls: Keylock Start/ Mushroom Stop  
 Connected to 13' Sealtite

**Hydraulic Equipment:**

Hydraulic Pump Capacity .....13 gpm .....49.2 L/min.  
 Normal Pressure .....1650 psi.....114 bar  
 Maximum Pressure .....1950 psi.....134 bar  
 Hydraulic Cylinder ....6" Bore x 2 1/2" Rod .....152 mm x 64 mm  
**Weight**.....5150 lbs. ....2336 kg


# RAMJET

## RJ-225



- ▼ **Side-Mounted Power Unit** for ease-of-maintenance – eliminates the need to go inside the compactor body for servicing.
- ▼ **Limit Switch** and all other parts of the power unit are easily accessible for ease-of-maintenance.
- ▼ **Reset Button** for the Motor Starter is also located on the outside which eliminates entry into the control box.

- ▼ **Control Station** with advanced, simplified 2 button control system. It is key-operated, fully automatic and contained in a weatherproof NEMA 4 enclosure. Connected to the power pack with 13' of sealtite, the controls can be located for operator convenience.

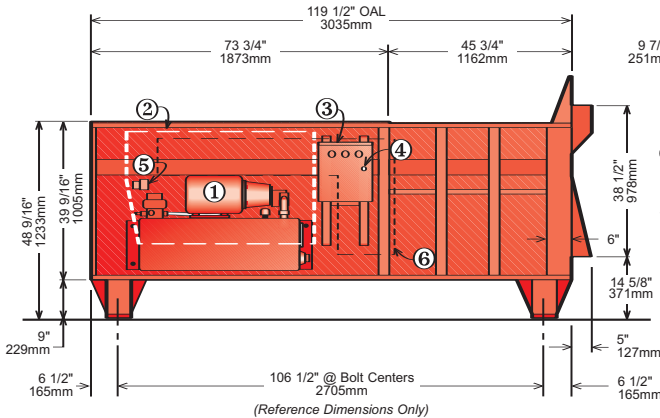

**Concrete Pad Requirements**


6" (152mm) Thick Reinforced 3000 PSI Concrete (4) 3/4" (20mm) Anchor Bolts (Min.)

- ① Side-Mount Power Unit
- ② Power Unit Weather Cover
- ③ Motor Control Panel
- ④ Motor Starter Reset Button
- ⑤ Limit Switch
- ⑥ Ram
- ⑦ Ram Guide Shoes with Replaceable Wear Strips

**Optional Features Available:**

- ▼ TrashMinder® advanced method for reporting and measuring container usage and fullness; multi-cycle timer; dual controls; ozone odor control system; hoppers and many other options are also available as well as a full line of compaction containers.
- ▼ Chutes can be constructed to meet your specifications and needs. They reduce the risk of pilferage of valuable merchandise or tools by eliminating a person's ability to hide items in the trash in order to recover them later from the waste receptacle.

**Top View of Typical Compactor & Container Configuration**

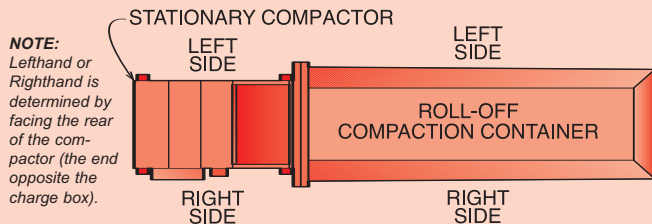

Visit our web site: [www.MarathonEquipment.com](http://www.MarathonEquipment.com)



**MARATHON EQUIPMENT COMPANY**

P.O. Box 1798 • Vernon, AL 35592-1798 USA • (205) 695-9105 fax (205) 695-7250 **1-800-633-8974**  
 130 Hwy. 339 • Yerington, NV 89447 USA • (775) 463-4030 fax (775) 463-4531 **1-800-624-5724**  
 1102 Industrial Park Rd. • Clearfield, PA 16830 USA • (814) 765-0200 fax (814) 765-2072 **1-800-922-7062**

Pictures in this literature are illustrative only. Specifications are subject to change without notice in order to accommodate improvements to the equipment. Certified in compliance with ANSI Regulation Z245.2, all OSHA standards, and certified under WASTEC's Stationary Compactor Certification Program. Products must be used with safe practice and in accordance with said regulations and standards.

